

Wireless Module

This module is to be mounted onto a PT-VMZ60 series or other applicable Panasonic projectors when using the wireless function.

Specifications


Power supply:	Supplied from the projector.
Standard:	IEEE 802.11b/g/n
Modulation:	Direct sequence spread spectrum (DSSS) system, Orthogonal frequency division multiplex (OFDM) system
Transmission speed (standard)**:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n: Up to 144 Mbps
Frequency range (channel):	2,412–2,462 MHz (1–11 ch)
Access method:	Access point mode
Security:	WPA2-PSK (TKIP/AES)
Interface:	USB 2.0 (Cannot be used with any projector other than a Panasonic projector with AJ-WM50 compatibility.)
Operating temperature	0 °C–40 °C (32 °F–104 °F)
Dimensions (W × H × D):	16 mm× 8 mm×41 mm (5/8 inch× 5/16 inch× 1-5/8 inch)
Weight:	Approx. 4.3 g* ² (0.01 lb* ²)
Applicable projector:	PT-RQ50K/RCQ10/RCQ80/VMZ60/VMW60/VMZ50/VMW50/VMZ40/ LW376/LW336/LB426/LB386/LB356/LB306/TW381R/TW380/TX440/TX350

*1 This is a theoretical speed. The actual transfer speed varies depending on the usage environment and connected devices.

*2 Average value. May differ depending on models.

- In this document, the suffixes at the end of the model numbers are omitted.

Dimensions

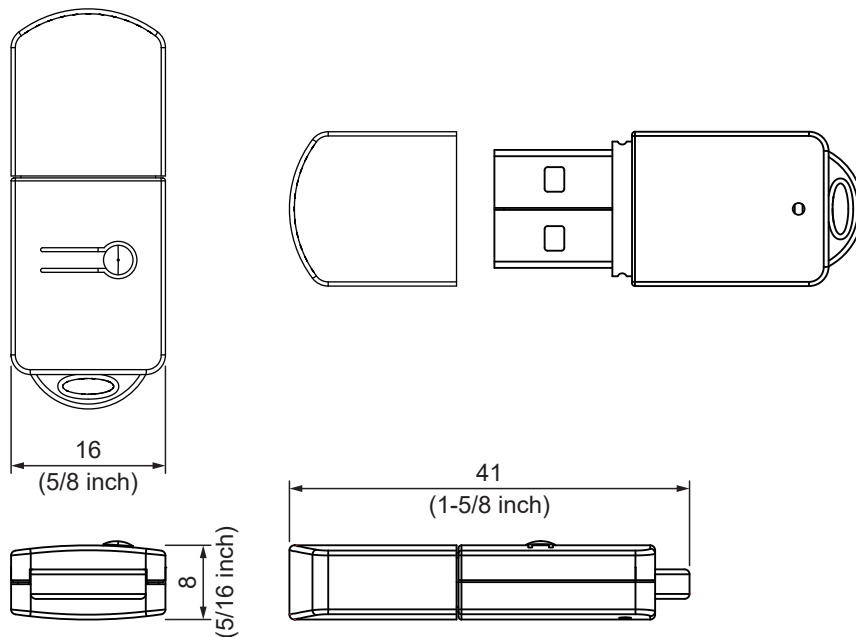

unit : mm (inch)

NOTE: This illustration is not drawn to scale.

Weights and dimensions shown are approximate. Specifications subject to change without notice.